

Pullman Booth Technical Specifications












Product Code and Description All dimensions quoted are rounded to the nearest 5mm or nearest 1/2 inch		A Width	B Depth	C Height Overall	D Seat Height	E Seat Width	F Height from Seat to Top	G Surround Thickness	H Table Length	I Table Width widest point	J Table Width thinnest point	K Space Between Sofas	L Weight
1	PULB2H Pullman 2 Seat Booth	1950 mm 77 in	1300 mm 51 in	1300 mm 51 in	450 mm 18 in	1180 mm 46.5 in	850 mm 34 in	60 mm 2 in	850 mm 33.5 in	595 mm 23.5 in	455 mm 18 in	600 mm 23.5	178 kg 392 lbs
2	PULB3H Pullman 3 Seat Booth	1950 mm 77 in	1900 mm 75 in	1300 mm 25.5 in	450 mm 18 in	1780 mm 70 in	850 mm 34 in	60 mm 2 in	1450 mm 57 in	595 mm 23.5 in	455 mm 18 in	600 mm 23.5	219 kg 483 lbs
3	PULBW2H Pullman 2 Seat Booth Wide	2250 mm 88.5 mm	1300 mm 51 in	1300 mm 51 in	450 mm 18 in	1180 mm 46.5 in	850 mm 34 in	60 mm 2 in	950 mm 37.5 in	950 mm 37.5 in	675 mm 26.5 in	900 mm 35.5	189 kg 417 lbs
4	PULBW3H Pullman 3 Seat Booth Wide	2250 mm 88.5 mm	1900 mm 75 in	1300 mm 25.5 in	450 mm 18 in	1780 mm 70 in	850 mm 34 in	60 mm 2 in	1550 mm 61 in	950 mm 37.5 in	675 mm 26.5 in	900 mm 35.5	233 kg 514 lbs

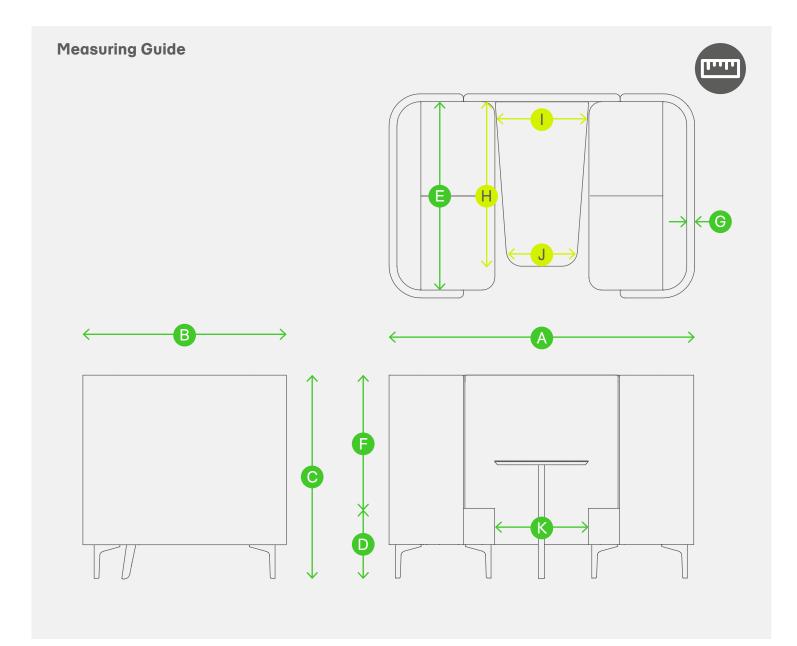

Pullman Booth Technical Specifications

Testing

Our seating is designed to meet or exceed all EN performance requirements per **EN16139:2013**, which includes the following tests:

- Seat and back static load test
- Seat front edge static load test
- Vertical static load on back
- Foot rest and leg rest static load test
- Arm sideways static load test
- Arm downwards static load test
- Vertical upwards static load on arm rests

- Seat and back durability test
- Seat front edge durability test
- Leg forward static load test
- Leg sideways static load test
- Seat impact test
- Back impact test
- Arm impact test

Structural Testing Certifications

PULB2H

Pullman 2 Seat Booth BS EN 16139,2013, Level 2 BSEN 15372:2016 Level 2

Static Load 200kg

Flammability

The cold cure foam material has been tested to meet the following standards:

British standard 5852:2006 Part 2

California Technical Bulletin 117-2013

Italian standards
UNI 9175-CLASS 1.IM

The flammability standard of the covering fabric is dependent on the choice made by the customer, details of the flammability rating of specific fabrics can be found on supplier's websites listed below.

www.kvadrat.dk
www.camirafabrics.com
www.butefabrics.com
www.panaz.com
www.maharam.com
www.vescom.com
www.ultrafabricsllc.com
www.crestleather.com

Servicing



If a component is damaged and needs replacing then please email our team with an image of the damaged part and reference your order number, we will be happy to facilitate any replacements.

Warranty



naughtone offers a 10 Year warranty across all products. Details on the terms and conditions of naughtones warranty can be found at naughtone.com/warranty