



Rhyme Modular Seating Technical Specifications

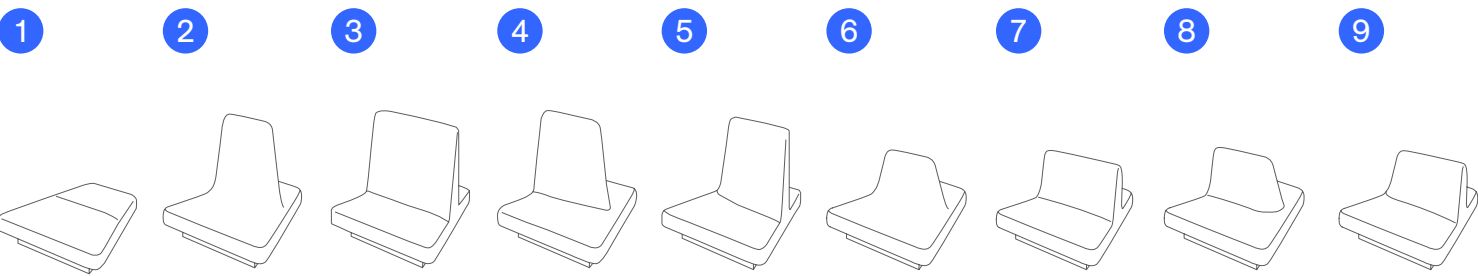

Product Code and Description All dimensions quoted are rounded to the nearest 5mm or nearest 1/2 inch	A	B	C	D	E	G
	Overall Width	Overall Depth	Overall Height	Seat Height	Height from Seat to Top	Weight
1 RYMBEN Rhyme Bench	1400 mm 55 in	1400 mm 55 in	445 mm 17.5 in	445 mm 17.5 in		75 kg 165 lbs
2 RYMS Rhyme Single	1400mm 55in	1400 mm 55 in	1355 mm 53.5 in	445 mm 17.5 in	910 mm 36in	108.3 kg 238.8 lbs
3 RYMMID Rhyme Middle	1400 mm 55 in	1400 mm 55 in	1355 mm 53.5 in	445 mm 17.5 in	910 mm 36in	110.8 kg 244.3 lbs
4 RYMENDA Rhyme End A	1400 mm 55 in	1400 mm 55 in	1355 mm 53.5 in	445 mm 17.5 in	910 mm 36in	125 kg 275.6 lbs
5 RYMENDB Rhyme End B	1400 mm 55 in	1400 mm 55 in	1355 mm 53.5 in	445 mm 17.5 in	910 mm 36in	125 kg 275.6 lbs
6 RYMLOS Rhyme Low Single	1400 mm 55 in	1400 mm 55 in	850 mm 33.5 in	445 mm 17.5 in	405 mm 16 in	98.9 kg 213.6 lbs
7 RYMLOMID Rhyme Low Middle	1400 mm 55 in	1400 mm 55 in	850 mm 33.5 in	445 mm 17.5 in	405 mm 16 in	96.5 kg 212.7 lbs
8 RYMLOENDA Rhyme Low End A	1400 mm 55 in	1400 mm 55 in	850 mm 33.5 in	445 mm 17.5 in	405 mm 16 in	93 kg 205 lbs
9 RYMLOENDB Rhyme Low End B	1400 mm 55 in	1400 mm 55 in	850 mm 33.5 in	445 mm 17.5 in	405 mm 16in	93 kg 205 lbs

Measuring Guide

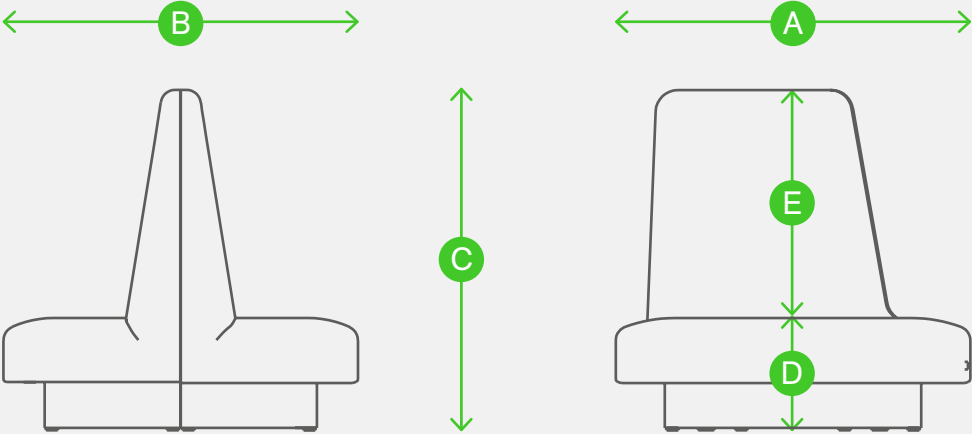

Rhyme Modular Seating Technical Specifications

Testing

Our chairs are designed to meet or exceed all EN performance requirements per **EN16139:2013**, which includes the following tests:

- Seat and back static load test
- Seat front edge static load test
- Vertical static load on back
- Foot rest and leg rest static load test
- Arm sideways static load test
- Arm downwards static load test
- Vertical upwards static load on arm rests
- Seat and back durability test
- Seat front edge durability test
- Leg forward static load test
- Leg sideways static load test
- Seat impact test
- Back impact test
- Arm impact test

Structural Testing Certifications

RYMENDA
Rhyme end A
BS EN 16139,2013, Level 1
Static load 160kg

Flammability

The cold cure foam material has been tested to meet the following standards:

British standard
5852:2006 Part 2

California Technical Bulletin
117-2013

Italian standards
UNI 9175-CLASS 1.IM

The flammability standard of the covering fabric is dependent on the choice made by the customer, details of the flammability rating of specific fabrics can be found on supplier's websites listed below.

www.kvadrat.dk
www.camirafabrics.com
www.butefabrics.com
www.panaz.com
www.maharam.com
www.vescom.com
www.ultrafabricsllc.com
www.crestleather.com



Servicing

If a component is damaged and needs replacing then please email our team with an image of the damaged part and reference your order number, we will be happy to facilitate any replacements.



Warranty

naughtone offers a **10 Year** warranty across all products. Details on the terms and conditions of naughtones warranty can be found at naughtone.com/warranty