

Always Chair Technical Specifications

Testing

Our chairs are designed to meet or exceed all EN performance requirements per **EN16139:2013**, which includes the following tests:

- Seat and back static load test
 - Seat front edge static load test
 - Vertical static load on back
 - Foot rest and leg rest static load test
 - Arm sideways static load test
 - Arm downwards static load test
 - Vertical upwards static load on arm rests
- Seat and back durability test
 - Seat front edge durability test
 - Leg forward static load test
 - Leg sideways static load test
 - Seat impact test
 - Back impact test
 - Arm impact test

Structural Testing Certifications

ALCHBWD
Always chair
with wooden base
BS EN 16139:2013, Level 2
Static load 200kg

ALCHBST4
Always chair
with 4 steel leg base
BS EN 16139,2013, Level 1
Static load 160kg

ALCHBSL
Always chair
with sled base
BS EN 16139,2013, Level 1
Static load 160kg
ANSI/BIFMA X5.4 – 2012
Static load 300 lb

ALCHBCL
Always chair
with cantilever base
BS EN 16139:2013, Level 1
Static load 160kg

ALCHB4S
Always chair
with 4 star base
BS EN 16139:2013, Level 2
Static load 200kg

ALCHB5S
Always chair
with 5 star base and lift
BS EN 16139,2013, Level 2
Static load 200kg

ALWBSST4
Always barstool
with 4 leg base
BS EN 16139,2013, Level 1
Static load 160kg

Flammability

The cold cure foam material has been tested to meet the following standards:

British standard
5852:2006 Part 2

California Technical Bulletin
117-2013

Italian standards
UNI 9175-CLASS 1.IM

The flammability standard of the covering fabric is dependent on the choice made by the customer, details of the flammability rating of specific fabrics can be found on supplier's websites listed below.

- www.kvadrat.dk
- www.camirafabrics.com
- www.butefabrics.com
- www.panaz.com
- www.maharam.com
- www.vescom.com
- www.ultrafabricsllc.com
- www.crestleather.com


Servicing

If a component is damaged and needs replacing then please email our team with an image of the damaged part and reference your order number, we will be happy to facilitate any replacements.

Warranty


naughtone offers a **10 Year** warranty across all products. Details on the terms and conditions of naughtones warranty can be found at naughtone.com/warranty

Always Chair Technical Specifications

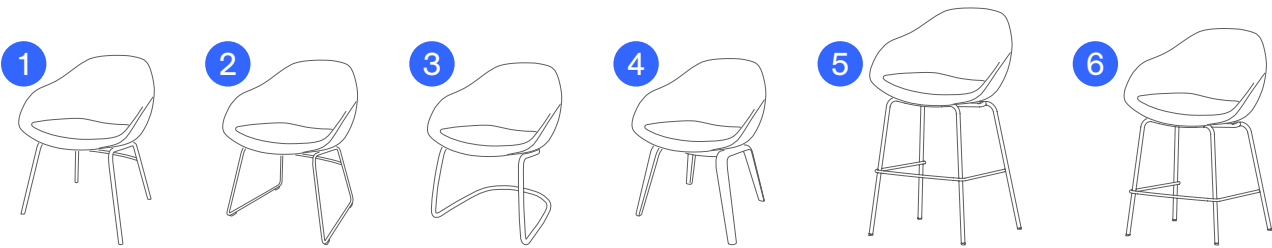

Product Code and Description All dimensions quoted are rounded to the nearest 5mm or nearest 1/2 inch	A Overall Width	B Overall Depth	C Overall Height	D Seat Height	E Seat Width	F Height from Seat to Top	G Weight
1 ALCHBST4 Always Chair on 4 Leg Base	625 mm 24.5 in	595 mm 23.5 in	780 mm 30.5 in	470 mm 18 in	415 mm 16.5 in	355 mm 14 in	10.3 kg 22.70 lbs
2 ALCHBSL Always Chair on Sled base	625 mm 24.5 in	595mm 23.5 in	780mm 30.5 in	470mm 18 in	415 mm 16.5 in	355 mm 14 in	11.1 kg 24.47 lbs
3 ALCHBCL Always Chair on Cantilever Base	625 mm 24.5 in	595mm 23.5 in	780mm 30.5 in	470mm 18 in	415 mm 16.5 in	355 mm 14 in	11.3 kg 24.91 lbs
4 ALCHBWD Always Chair on Wooden Base	625 mm 24.5 in	595 mm 23.5 in	780 mm 30.5 in	470 mm 18 in	415 mm 16.5 in	355 mm 14 in	9.68 kg 21.34 lbs
5 ALBSST4 Always Barstool on 4 Leg Base	630 mm 25 in	600 mm 23.5 in	1065 mm 42 in	755mm 30 in	415 mm 16.5 in	355 mm 14 in	14.67 kg 32.34 lbs
6 ALCHSST4 Always Counter Height Stool on 4 Leg Base	630 mm 25 in	600 mm 23.5 in	965 mm 38 in	655 mm 26 in	415 mm 16.5 in	355 mm 14 in	14.32 kg 31.57 lbs

Measuring Guide

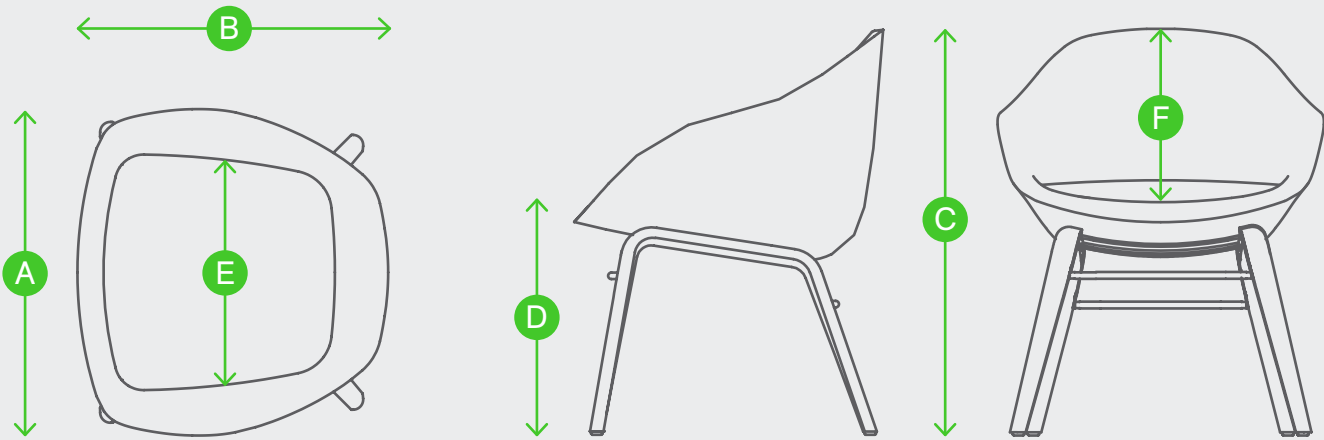

Always 4 and 5 Star Technical Specifications



Product Code and Description All dimensions quoted are rounded to the nearest 5mm or nearest 1/2 inch		A Overall Width	B Overall Depth	C Overall Height	D Seat Height	E Seat Width	F Height from Seat to Top	G Weight
7	ALCHB4S Always 4 Star Base	625 mm 24.5 in	595 mm 23.5 in	780 mm 30.5 in	470mm 18 in	415 mm 16.5 in	355 mm 14 in	12.4 kg 27.3 lbs
8	ALCHB5S Always 5 Star Base	635 mm 25 in	595 mm 23.5 in	780 mm 30.5 in	470 mm 18 in	415 mm 16.5 in	355 mm 14 in	12.6 kg 27.7 lbs
9	ALCHB5SL Always 5 Star Base with Gas Lift Mechanism	635 mm 25 in	595 mm 23.5 in	780 – 880 mm 30.5 – 34.5 in	470 – 570 mm 18 – 22.5 in	415 mm 16.5 in	355 mm 14 in	12.6 kg 27.7 lbs

Measuring Guide

