

Rhyme Modular Seating

An architectural seating collection that sets the scene.



Create harmonious settings with Rhyme, a striking modular seating system whose angular forms are ideal for dividing and defining open spaces.

Core Features

High & low back versions plus option to add power and data.
Upholstery available in multiple fabrics.
Plinth can be finished in 16 standard RAL colours.
10 year warranty & global take-back programme.

Designed by NaughtOne

Colours


NaughtOne RAL palette



Enquire about this product at www.naughtone.com

Sizes

All dimensions quoted are rounded to the nearest 5 mm or nearest 1/2 inch



RYMS

Rhyme Single
w1400 d1400 h1350
seat 445 (mm)
w55 d55 h53
seat 17.5 (in)




RYMMID

Rhyme Middle
w1400 d1400 h1350
seat 445 (mm)
w55 d55 h53
seat 17.5 (in)




RYMENDA

Rhyme End A
w1400 d1400 h1350
seat 445 (mm)
w55 d55 h53
seat 17.5 (in)



RYMENDB

Rhyme End B
w1400 d1400 h1350
seat 445 (mm)
w55 d55 h53
seat 17.5 (in)



RYMLOS

Rhyme Low Single
w1400 d1400 h850
seat 445 (mm)
w55 d55 h33.5
seat 17.5 (in)




RYMLOMID

Rhyme Low Middle
w1400 d1400 h850
seat 445 (mm)
w55 d55 h33.5
seat 17.5 (in)




RYMLOENDA

Rhyme Low End A
w1400 d1400 h850
seat 445 (mm)
w55 d55 h33.5
seat 17.5 (in)




RYMLOENDB

Rhyme Low End B
w1400 d1400 h850
seat 445 (mm)
w55 d55 h33.5
seat 17.5 (in)



RYMBEN


Rhyme Bench
w1400 d1400 h420
seat 445 (mm)
w55 d55 h16.5
seat 17.5 (in)



RYMPLINTHINFILL

Rhyme Plinth
Infill Panel
w313 d167 h187 (mm)
w12 d7 h7 (in)

Plinth Finishes



White / black powder coated plinth Standard

RAL powder coated plinth NaughtOne colours

Power Options



See price list for details

Structural Testing Certifications

RYMENDA
Rhyme End A
BS EN 16139:2013, Level 1
Static Load 160 kg

Product Sustainability Statement

The Rhyme Modular Seat is available in a range of sizes, configurations and finishes but for the purpose of this document we have a specific example from the range: Rhyme End A.


Recyclable Content



Recycled Content



Material Percentage Split

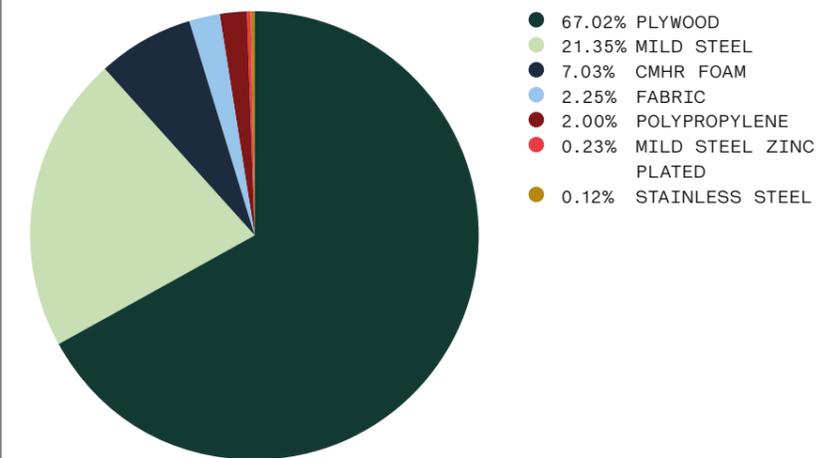

Environmental Attributes

- NaughtOne is FISP and ISO14001 certified
- NaughtOne is FSC® certified (FSC® C134222)
- 125 kg total weight
- 30.7% Recyclable (foam, plinth, fixings and feet)
- 67% Reusable (frame)
- 30% Recycled Content (plinth and fixings)
- SCS Indoor Advantage™ Gold ANSI / BIFMA Furniture Emissions Standard (M7.1 / X7.1-2011 R2021) and ANSI / BIFMA e-3-2019 (Credits 7.6.1, 7.6.2, 7.6.3)

These attributes can help you to achieve criteria towards LEED, BREEAM, Ska and WELL building certifications.

Flammability

The cold cure foam material has been tested to meet the following standards:

- British standard: 5852:2006 Part 2
- California Technical Bulletin: 117-2013
- Italian standard: UNI 9175-CLASS 1.IM

The flammability standard of the covering fabric is dependent on the choice made by the customer. Details of the flammability rating of specific fabrics can be found on supplier websites.